



Selectronic Premier thermostatic showers offer the highest level of temperature accuracy. PLUS models also feature a longer riser rail with 250Kg\* grab rail duty and a 2 metre shower hose, ideal for specification to assist seated showering in high care applications.


## Key Features

- Highly accurate, temperature control to  $\pm 0.5^{\circ}\text{C}$  for a safe and comfortable showering experience
- Push button controls with audible adjustment confirmation for ease of operation
- Large LED digital temperature display
- Phased shutdown safety protection for next user cool start up and scale protection
- 3 maximum temperature limiter lock options (40°C), (41°C), (43°C) or unlocked (25 - 46°C) set at installation
- Simple push button rapid commissioning
- Data logger for user and performance analysis
- Right hand side multi-entry connection options
- 5 spray mode shower head with easy rub-clean nozzles
- 250kg\* load bearing grab riser rail with reinforced 4-point fixing brackets (\*subject to correct wall material fixing use)
- 2mtr anti-kink flexible shower hose, adjustable handset clamp, soap dish and shower hose retaining ring

## Product Range

Item Code:	Model No:	Description	kW
100085	RSELP85P	Selectronic Premier PLUS	8.5
100092	RSELP95P	Selectronic Premier PLUS	9.5
100108	RSELP108P	Selectronic Premier PLUS	10.8

## Dimensions

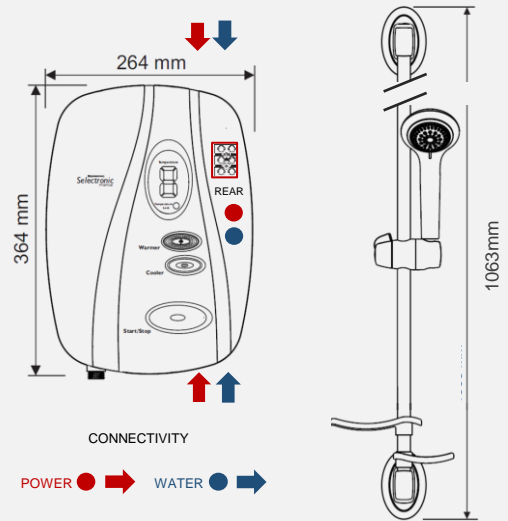

## Technical Details

Model	RSELP85P	RSELP95P	RSELP108P
Item Code	100085	100092	100108
EAN /Bar Code No.	5011139100085	5011139100092	5011139100108
Output (kW)	8.5	9.5	10.8
Current Rating (Amps)	36	40	45
Energy Rating (Class)	A	A	A
Energy Rating (%)	37	37	37
Consumption (kWh/A)	495	488	489
Load Profile	XS	XS	XS
Sound (dB)	15	15	15
Running Pressure psi (bar)	10 (0.7) - 140 (10)		
Temp. Control Accuracy	$\pm 0.5^{\circ}\text{C}$		
Start-up Temperatures	40, 41 or 43°C		
Temperature Range	25 - 46°C		
IP Rating	IPX5		
Approvals / Mark	BEAB, BEAB CARE, WRAS, RNIB & CE		
UK Warranty (years)	5*		
Box dimensions (mm)	1005 x 285 x 130		
Gross weight (kg)	5.1		
Net weight (kg)	4.2		
Full pallet quantity	30		
Showers per layer	3		



\*Subject to product registration within 30 days.



Tried and Tested