



www.redring.co.uk

Sales
0844 372 7750*

The team can be contacted from 8:30 until 17:00 Monday to Friday.
rxsalesoffice@redringxpelair.com

Technical
0844 372 7766*

Our UK based call centre is open Monday to Friday from 8:30 until 17:00.
technical.services@redringxpelair.com



LIKE, FOLLOW, SHARE AND VIEW!

*Calls cost 7p per minute plus your telephone company's network access charge. R084 (June 2017)





TRUSTED, CARING & INTELLIGENT

Made in Britain for over 25 years, Selectronic has been trusted by care professionals, families and those who are less able, for the very best in shower safety, intelligence and care.

Every element of the Selectronic Premier range has been specifically designed to meet the all-inclusive needs of end-users and carers.

Working closely with BEAB Care and RNIB in line with Equality Act guidelines, Redring's British design team has embraced the latest technology to create a thermostatic shower range that offers unparalleled peace of mind.

The Selectronic is widely specified as an instantaneous thermostatic shower for general family use, for above the bath and in adapted level access bathrooms for the elderly and less able. Its retro-fit footprint covers most makes of shower and eliminates the need to re-tile.

From its exceptional level of manufacturing quality control, temperature accuracy, to its intuitive user controls, smart functionality and speedy one button commissioning, Selectronic is easy to install, easy to use and easy to trust.





Selectronic Premier

Fully thermostatic control within +/-0.5°C, with adjustable temperature locking, one-touch buttons, LED display, audio feedback, smart data logger, diagnostic fault-finder and Eco Water and Power Save functions. Includes 0.5 metre riser rail, with 1.25 metre hose, adjustable showerhead holder and soap dish.

Selectronic Premier Plus

All the advanced features of Selectronic Premier, plus a longer 1 metre riser rail and 2 metre hose to allow users to comfortably operate the shower whilst seated. Also includes high contrast operational components to assist visually impaired use.



Selectronic Premier Remote

All the advanced features of Selectronic Premier Plus, with a unique wireless remote control, complete with wall-mounted docking station, that allows carers to start/stop the shower from up to 10 metres outside the enclosure or screen.

Advanced technology to provide a comfortable showering experience for everyone.

For Elderly, Less Able & Carers

- High precision thermostatic control accurate within +/- 0.5°C
- Matt anti-glare finish within grey stripes and raised tactile easy push button controls with audible and visual indicators assist the visually impaired
- Contoured surfaces and edges for safety
- LED digital illuminated display and locked temperature function
- Choice of 3 temperature locked settings 40, 41, 43°C (set on install)
- Phased shutdown
- 30 minute auto switch off/on temp lock mode
- 2 metre hose model for seated and carer assisted showering
- 10 metre range wireless remote control model with docking station
- Compatible with all wired pumped systems including the whale instant match

For all the family

- Sequenced override for warmer shower with automatic reversion to temperature lock protection
- Choice of 6 spray patterns for a more stimulating shower experience
- 1.25m metre hose option for general shower and over bath use


Smart and Eco Features

- A rated for energy efficiency
- Integrated Eco water save (max 6l/min) and power save function I (selectable at install)

Installation and Maintenance

- Data logger for use by a Service Engineer monitors shower temperature and usage
- Multiple heating elements for best in its class lime scale tolerance
- Flow Transducer enables operation from both mains pressure and overhead gravity tanks with positive head from 0.7 Bar to 10 Bar
- Compatible with leading waste pumps in level access bathrooms and wet rooms
- Fast and easy installation with one button commissioning
- Diagnostic fault reader to enable Service Personnel to identify and resolve problems swiftly
- Retro footprint covers most shower manufacturers models
- Rub clean multi-mode shower head
- Comprehensive technical after-sales support

Key features:

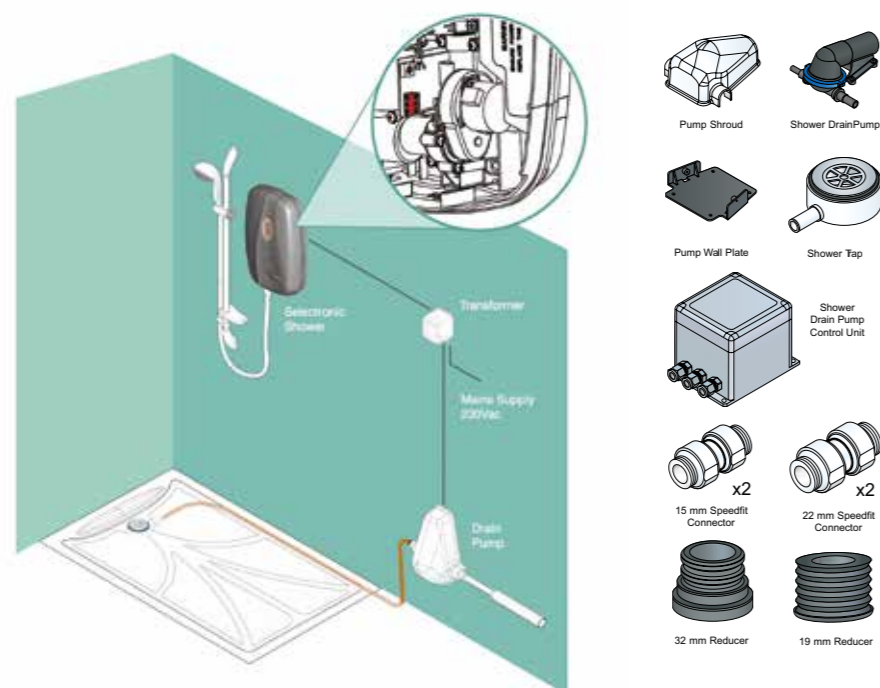

Selectronic Premier W.P. Model

W.P. models are ready for 2 or 3 wire connection to a waste pump. Compatible with most leading waste pumps including the Whale Instant Match.

Selectronic Premier L.A.P. Model

For level access bathrooms where gravity drains are not suitable, Selectronic Premier Plus is available bundled with an electronic pump kit, to help drain away residual water.




Technical Specifications

- Operating water pressure 0.7 Bar to 10 Bar (10 psi to 150 psi)
- Water connection – ½" BSP compression fittings
- Right hand electrical connection only
- Water pipe connections via right hand side - top, bottom or rear entry points
- kW loading at 240V: 8.5, 9.5 or 10.8
- Recommended cable sizes and Fuse / MCB ratings:
 - 8.5kW – 6-10mm² 40 Amps
 - 9.5kW – 6-10mm² 40 Amps
 - 10.8kW – 10-16mm² 45 Amps



3 yrs + 2 yrs upon shower registration


Water flow and temperature graph

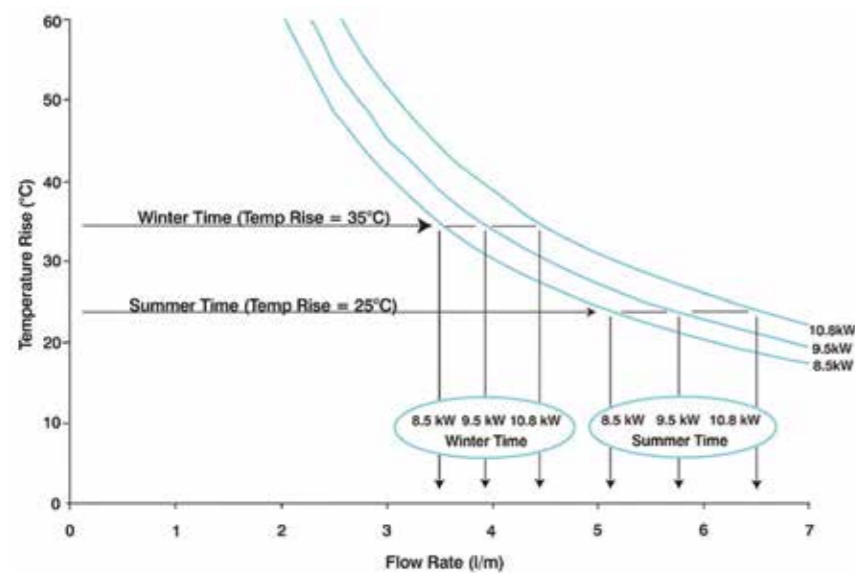


The graph shows the relationship between hot water flow and temperature rise obtainable from an instant electric shower. The different power loading (available in the range) expressed in kilowatts, are shown as curves on the graph. The incoming mains water temperature into your property can vary on average from 5°C in winter to 15°C in summer. The graph shows a typical winter and summertime condition. In winter the 8.5kW shower will give you a flow rate of about 3.5 litres per minute, while in summer it will give approximately 5.1 litres per minute.

Dimensions

Selectronic Premier
(with 1.25m hose)

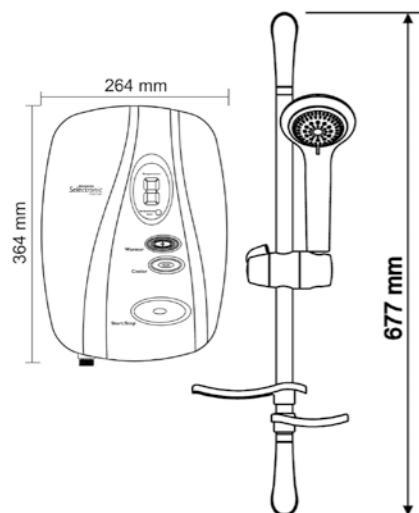

Selectronic Premier Plus
(with 2m hose)

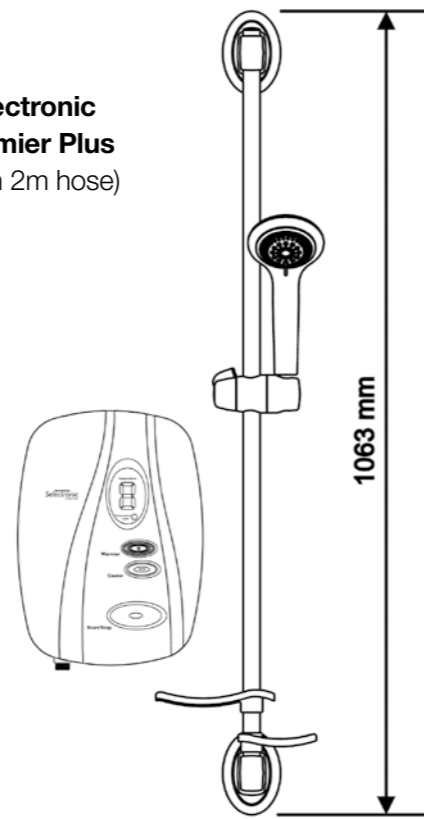


Catalogue Number	Model/Description
53677501	SELP85S Selectronic Premier STD 8.5kW
53678501	SELP95S Selectronic Premier STD 9.5kW
53679501	SELP108S Selectronic Premier STD 10.8kW



Catalogue Number	Model/Description
53677505	SELP85P Selectronic Premier PLUS 8.5kW
53678505	SELP95P Selectronic Premier PLUS 9.5kW
53679505	SELP108P Selectronic Premier PLUS 10.8kW



Catalogue Number	Model/Description
53677510	SELP85PR Selectronic Premier REMOTE 8.5kW
53678510	SELP95PR Selectronic Premier REMOTE 9.5kW
53679510	SELP108PR Selectronic Premier REMOTE 10.8kW

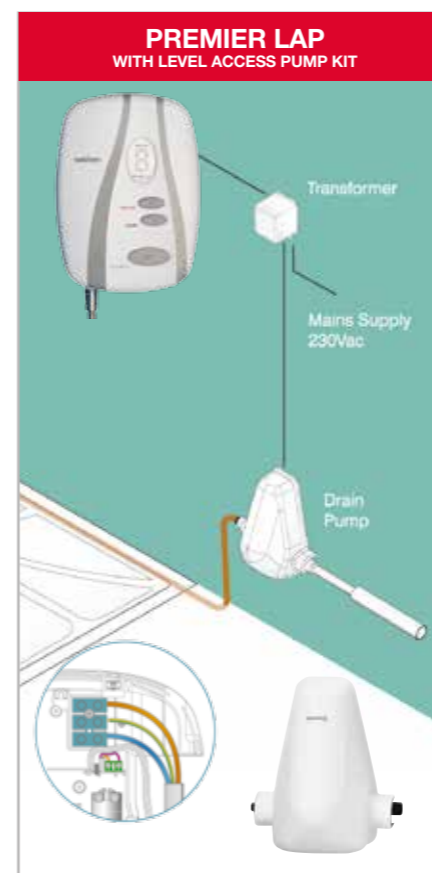

Catalogue Number	Model/Description
53677590	SELP85LAP* Selectronic Premier PLUS 8.5kW
53678590	SELP95LAP* Selectronic Premier PLUS 9.5kW



Catalogue Number	Model/Description
53677515	SELP85WP** Selectronic Direct Pump Link 8.5kW
53678515	SELP95WP** Selectronic Direct Pump Link 9.5kW

*WP models are ready for connection to most 3 wire digital pumps and most 2 wire on/off pumps.