


Popular (Copper)

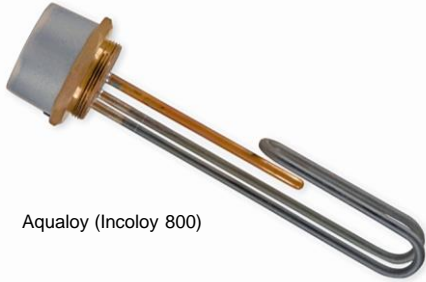

Aqualoy (Incoloy 800)

Key Features

- 2¼" BSP standard boss domestic immersion heaters
- Available in 11, 14 & 27" lengths to suit top or side cylinder entry
- All are fitted with Dual cut-out safety protection to comply with European safety standard EN60335-2-73
- Adjustable rod thermostat temperature control (Factory set at 60°C) with manual reset secondary cut-out
- Popular copper heating element for soft to neutral water areas
- Aqualoy Incoloy 800 sheathed heating elements for improved scaling resistance in harder water areas
- A GU11" side entry heater for unvented cylinders with a 1¾" BSP boss also available
- 1 year UK guarantee on Popular Immersion Heaters
- 2 year UK guarantee on Aqualoy Immersion Heaters

Product Range


Item Code:	Model No:	Description	kW
33324501	P11DC	Popular 11" Immersion Heater	3
33324502	P14DC	Popular 14" Immersion Heater.	3
33324503	P27DC	Popular 27" Immersion Heater.	3
33324601	A11DC	Aqualoy 11" Immersion Heater	3
33324602	P27DC	Aqualoy 27" Immersion Heater	3
33324701	GU11DC	Aqualoy 11" (1¾" BSP) Imm/Heater	3



Dual cut-out safety protection



Dimensions

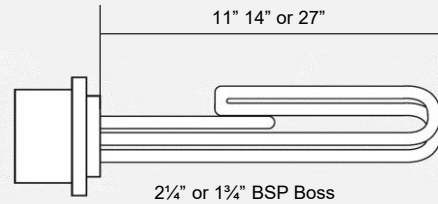

Popular Copper - Technical Details

Model	P11DC	P14DC	P27DC
EAN/Bar Code No.	5017084334513	5017084334520	5017084334537
Cylinder Boss Thread Size	2¼" BSP	2¼" BSP	2¼" BSP
Immersed Length (inches)	11	14	27
Output @ 240V (kW)	3	3	3
Current Rating (Amps)	15	15	15
Temperature Range	15 to 65°C	15 to 65°C	15 to 65°C
Cut-out Temperature	70°C	70°C	70°C
IP Rating	IPX4	IPX4	IPX4
Approvals / Mark	BEAB & CE	BEAB & CE	BEAB & CE
UK Warranty (years)	1	1	1
Box dimensions (mm)	93 x 340 x 93	93 x 500 x 93	93 x 770 x 93
Weight Gross / Net (kg)	0.63 / 0.6	0.7 / 0.64	0.9 / 0.83

Aqualoy Incoloy 800 - Technical Details

Model	A11DC	A27DC	GU11DC
EAN/Bar Code No.	5017084334612	5017084334629	5017084334711
Cylinder Boss Thread Size	2¼" BSP	2¼" BSP	1¾" BSP
Immersed Length (inches)	11	14	11
Output @ 240V (kW)	3	3	3
Current Rating (Amps)	15	15	15
Temperature Range	15 to 65°C	15 to 65°C	15 to 65°C
Cut-out Temperature	70°C	70°C	70°C
IP Rating	IPX4	IPX4	IPX4
Approvals / Mark	BEAB & CE	BEAB & CE	BEAB & CE
UK Warranty (years)	2	2	2
Box dimensions (mm)	93 x 340 x 93	93 x 770 x 93	93 x 340 x 93
Gross weight (kg)	0.63 / 0.6	0.82 / 0.7	0.7 / 0.6